

BRASH IMPORTS

WWW.BRASHIMPORTS.COM.AU

6 Riders motorcycle multi-interphone

USER MANUAL



Multifunctional communication tool for motorcyclists !!

Main Features:

Communication in 6 riders, one rider can pair with 5 riders, and can choose which person of the group to talk at a time. real full duplex wireless communication in 6 riders by bluetooth system

Maximum talking range 1000 meters

Up to 120Km/h working speed

Up to 7 hours talking time

Safe auto-receiving cell phone calls

Advanced A2DP & EDR bluetooth profile

Stereo music/audio function(transmits from A2DP enabled cell phone/MP3/GPS)

Line in audio interface, can connect with any audio source

Wind noise DSP cancellation

Water-resistance, full weather

Introduction :



Rider to rider Intercom in 6 riders
(Full duplex)



Rider to pillion Intercom
(Full duplex)



We will describe this communications kit as **6 R (Riders) M (Multifunctional) I (Intercom)**

This **6RMI** can either be used for rider or for pillion.

This **6RMI** can connect with three kinds of bluetooth devices: a bluetooth enabled cell phone, five **6RMI** (or: four riders and 1 pillion), an audio source which with a built in or a external audio bluetooth transmitter.


This **6RMI** is a multifunctional device for motorcyclists and skiers, it can be used:

1) **As a handfree bluetooth headset for cell phone calls,**

while out riding, the auto answer feature of the internal Bluetooth profile enables safe automatic hand free answering of the phone call automatically. It also offers a call rejecting function.

—**receive the cell phone calls even you do not need to press any button, you just need to rider your bike as normal**, the process of receiving call will be automatic, after ring on of the call about 5 seconds, it will receive the call automatically.

2) **As a two way wireless full duplex interphone in 6 riders or between rider & pillion,**

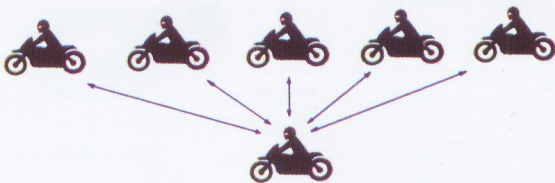

Any rider could choose one of 5 riders to talk at a time !

The maximum communication range over a high clear line of sight path can reach **1000m !**
(this maximum range is not guaranteed).

Typical effective range in city is approximately 700m. Please note that actual range will depend on weather conditions, terrain, presence of obstacles i.e. a large vehicle, buildings non line of sight etc.

Unlike a one-way walkie talkie, which is only half duplex i.e. it can not speak and listen simultaneously, the **6RMI** offers real-time talking like a normal telephone.

It can connect with 5 other riders or connect with another rider and his/her pillion.





The rider can choose which person to talk with

The working speed can be up to 120Km/h !


3) **As a wireless bluetooth stereo music receiver and speaker,** this **6RMI** has **EDR** and **A2DP** profile, with **EDR** and **A2DP** profile it can offer another important function--- listening to stereo music from **A2DP** enabled cellphone, MP3 or navigation audio information from **GPS** (this **MP3** or **GPS** should have a built in audio bluetooth transmitter)

4) **As a bluetooth headset for receiving GPS navigation audio instructions** (this **GPS** should have a built in bluetooth transmitter)

Components of retail box

Component	Parts Number
6RMI headset main part	6RMI-001 
Clip for mounting the main unit	6RMI-002 
Speakers & microphone & audio plug	6RMI-003 
AC & USB Charger (AC110V-220V / DC OUTPUT 5V)	6RMI-004 
User manual	6RMI-006


Main 6RMI communications unit

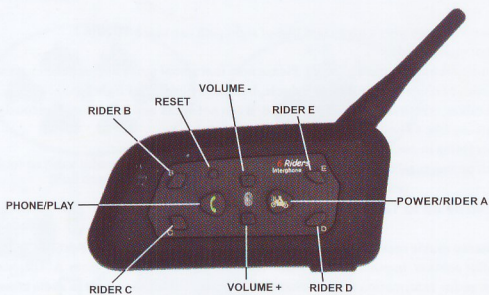

Clip & hanging-hole for mounting the main 6RMI unit




Clip/Inserted plate/Spacer




Clip with sticker for option

Speakers/Boom Microphone/audio plug

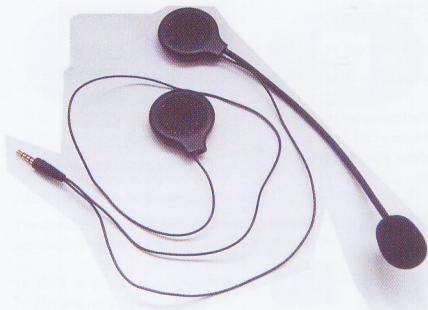

The AC & USB Charger



Note: Different country may has different adaptor

Before using: Charging the 6RMI

Before using this device, Please charge the 6RMI main device at least **three hours**.

We have provided you with the ability to charge the system via the USB port of your computer or if you are away on a trip, you can use the supplied Multi-voltage USB power adapter.

The charging cable has a small USB plug for the headset and the large USB plug for the computer or AC adapter, please observe to correct orientation of the USB plug and socket before inserting

- 1) Insert the 2.5mm plug of the charging cable, into the small charging jack of the 6RMI, you can either charge by computer or AC adapter.
- 2) While charging, the red LED on the headset module will illuminate, when the charging is finished, the red LED will extinguish.

Note: if you do not use the 6RMI for a month or more, to protect the Poly-Li battery, please charge the 6RMI at least every month. (the fault damaged by wrong charging will be not guaranteed).

Attaching and removing the BIM main unit on your helmet

With the clip, You can easily mount the main unit of the BIM on a helmet within 3 minutes.

Step:

- 1) find a best position on the **left** side of your helmet to put the clip
- 2) Insert the inserted plate between shell and foam of the helmet
Fix the clip and the inserted plate on the helmet with the screws
- 3) hang the main unit of the 6RMI on the clip




Clip

Inserted plate for clip

Spacer



Insert the plate between the shell and the foam of a helmet, fix with screws



Clip fixed on helmet



6RMI mounted on a helmet

Note: 1) If the shell of your helmet is a little thick, you could put the Spacer between the dip and the inserted plate.

2) There are some helmets that the shell is very thick, maybe it is difficult to fix above dip on these helmets. In this case, you could use below clip with sticker



Front




Back

Attaching the two speakers and the microphone

The success of the system depends on the careful positioning of the earspeakers directly over top of the ear canals, this will give the best signal to noise of the received audio..

- 1) Find the best positions to attached the two speakers inside the helmet, these positions should be near to your left and right ear.
- 2) Remove the protective backing of the Velcro and mount the Velcro pads in the correct positions , attach the two speakers on the Velcro inside your helmet, the speaker with **short** wire cord for **left** ear, the speaker with long wire cord for right ear.



the speaker with **short** wire cord for right ear



the speaker with long wire for **left** ear

Adjust the position of the microphone

Note: To reduce the external noise, you need to close the visor while riding, and please adjust the position of the microphone to be right in front of your mouth with the foam just touching your lips, the visor should cover the microphone effectively! (Minimizes wind noise contribution)



V

Correct position of the microphone



X

Wrong position of the microphone

3) Plug in the positioned headset to the communications module and attach it to the side of the helmet.

Operation:

The operation is friendly and very easy.

Pairing with your Bluetooth phone for the first time

Note: You must have a Bluetooth enabled phone to "Pair" with the 6RMI

The rider and pillion pairing their headsets with their respective mobile phone should be at different time.

Before using the 6RMI, please familiarize yourself with Bluetooth function of your cell phone. Read the instruction manual that came with the phone so you can enable its Bluetooth function.

Before you can use this 6RMI in combination with your phone, you will need to "pair" it With your cell phone for the first time. This usually only needs to be performed once with that individual phone however follow the instructions supplied by the phone manufacturer and save the "pairing" so it will be automatically connected when this Phone and the 6RMI come into contact again.

- 1) Enable the Bluetooth function on your cell phone. Short press(< 1 second) Reset key on the **6RMI**.
- 2) You must place the **6RMI** in "Pairing mode", this is done by way of a holding down the Power/Interphone key on the headset, until the red & blue LED flash alternately.
- 3) Begin the "searching for Bluetooth device" on the cell phone according to the phone's instructions
- 4) when the **6RMI** is discovered, the cell phone will display **MOTOR PHONE** select this and accept the connection
- 5) The cell phone will ask you to input a password to enable this connection, when prompted input password : 0000 (four zeros)
- 6) Your phone will confirm that pairing has succeeded. Note that the only light showing on the headset is now the blue one and it will flash once every 5 seconds

Basic 6RMI Operation

Turn on

Short press(< 1 second) Reset key on the **6RMI**.

press the Power/ RIDER A key for 6 seconds or so, until the blue lamp illuminate, promptly release the Power/Interphone key, then the blue led will flash every 2-5 seconds, and you can see that on the screen of your cell phone the **6RMI** will ask your cell phone to connect with it, select "yes" on your phone then they will connect each other.(for some phones, you will have to connect the **6RMI** by the phone)

Turn off

press the Power/Interphone key for 6 seconds or so, until the blue lamp long illuminate, promptly release the Power/RIDER A key then the blue led will extinguish.

Increase the volume

Short press of the V+ key

Reduce the volume

Short press of the V- key

Re-connect the cell phone

For some reason(e.g. In some regions of high RF strength), may the **6RMI** will lose connection with the cell phone, a short press on the Phone/Play key, they will connect each other again.

Safe Cell phone calls function

1) Receive a cell phone call automatically

When income a cell phone call, you will hear the ring on the cell phone and about 3-5 seconds later, the **6RMI** will receive the call automatically.

2) Terminate cell phone call

When you finish talking on the cell phone ,a short press the Phone/Play Key, will terminate the call.

3) Reject a cell phone call

When income a cell phone call, you will hear the ring, within 1 second immediately press the Phone/Play key about 2 seconds, it will reject the call.

4) Dial the last number

Press the Phone/Play key 2-3 seconds, it will dial the phone number that you dialed last time.(note: some cell phone do not support this function)

5) Make a cell phone call Dial a number on your phone as normal, (but don't do this if you are on road for your safety) the sound will be automatically heard in your headset

notice: some phones, like Panasonic x70, will not send the audio to the headset, you may have to press the Phone/Play key to transmit the sound to your headset

Interphone Function

Set up for bike-to-bike and rider-to-pillion intercom: pairing

Pairing is a one time process that is required for mutual recognition between a 6RMI and other 6RMI, once the two headsets are paired, they will retain paired whenever they are within range.

Please note that you can speak via intercom to one buddy headset at a time.

Note:

- when you are pairing two 6RMIs, you must keep other 6RMIs in status of power off.**
- You could pair your 6RMI with maximum total five 6RMIs, you also could only pair your 6RMI with one 6RMI.
- Please **note!** because the POWER/RIDER A key is a multifunctional key, so **once you have defined one of other 6RMIs as rider A, the method that pair your 6RMI with rider A will be different to the way of pairing with rider B, C, D, E, F.** before you pair your 6RMI with another 6RMI(rider A) by POWER/RIDER A key, please confirm your 6RMI is in status of power off.


1) Pairing two 6RMIs

Maybe you only need to communicate with a parson (a rider or a passenger), you can simply pair two 6RMIs according to below step:

To be sure that your 6RMI and rider A(another 6RMI) are in status of power off.

Short press(< 1 second) Reset key on your 6RMI and on another 6RMI, simultaneously hold the POWER/RIDER A key on your 6RMI and hold the POWER/RIDER A key on another 6RMI until the red & blue LED of the two pairing 6RMIs flash, **short press** the POWER/RIDER A key on **one of 6RMI**, 5-9 seconds later the red LED of both 6RMIs will extinguish and the blue LED then will flash briefly every 2-5 seconds, thus they have finished the pairing(now you could talk with another 6RMI).

2) Pairing all 6 RMIs



To avoid being confused, we suggest you to stick respectively 6 label of A, B, C, D, E, F on 6 units of 6RMIs

Note: one time it only allows one of other five 6RMIs to pair with unit A, and when you are pair two 6RMI, please confirm that other units are in status of power off.

1. Pair B,C,D,E,F 6RMIs with unit A

1.1 Pair unit B,C,D,E with unit A

For example: pair unit B with unit A:

Power on unit A (the blue LED of unit A will flash), be sure that unit B is in status of power off.

Simultaneously hold the B key on unit A and hold the A key on unit B until the red & blue LED of the both pairing 6RMIs flash, short press the B key on unit A, 5-9 seconds later the red LED of both 6RMIs will extinguish and the blue LED then will flash briefly every 2-5 seconds, thus they have finished the pairing(now you could talk each other).

1.1.1 Pair unit C,D,E with unit A, the way is same to above 1.1. you just need to change the B to C or D or E

1.2 Pair unit F with unit A

Because there is not F key on 6RMI, so the way of pairing unit F with unit A is different a bit.

To be sure that unit A and F is in status of power off.

Simultaneously hold the A key on unit A and hold the A key on unit F until the red & blue LED of the both pairing 6RMIs flash, short press the A key on unit A, 5-9 seconds later the red LED of both 6RMIs will extinguish and the blue LED then will flash briefly every 2-5 seconds, thus they have finished the pairing(now you could talk each other).

2. Pairing between unit B,C,D,E

For Example: pair unit B with unit C

Power on unit B(the blue LED of unit B will flash), Power on unit C(the blue LED of unit C will flash).

Simultaneously hold the C key on unit B and hold the B key on unit C until the red & blue LED of the both pairing 6RMIs flash, short press the C key on unit B, 5-9 seconds later the red LED of both 6RMIs will extinguish and the blue LED then will flash briefly every 2-5 seconds, thus they have finished the pairing(now you could talk each other).

3. Pairing unit B,C,D,E with unit F

Because there is not F key on 6RMI, so the way of pairing unit F with unit B,C,D,E is different a bit.

For Example: pair unit B with unit F

Power on unit B(the blue LED of unit B will flash), Power on unit F(the blue LED of unit F will flash).

Simultaneously hold the B key on unit B and hold the B key on unit F until the red & blue LED of the both pairing 6RMIs flash, short press the B key on unit B, 5-9 seconds later the red LED of both 6RMIs will extinguish and the blue LED then will flash briefly every 2-5 seconds, thus they have finished the pairing(now you could talk each other).

To get all pairing details, please refer to below pairing chart,

INTERPHONE	PAIRING BUTTON	STATUS BEFORE PAIRING	WHEN RED AND BLUE LED FLASH ON BOTH UNITS, SHORT PRESS BELOW BUTTON ON LEFT UNIT	←pair each other→	INTERPHONE	PAIRING BUTTON	STATUS BEFORE PAIRING
unitA	B	powered on	B	←pair each other→	unitB	POWER/A	powered off
unitA	C	powered on	C	←pair each other→	unitC	POWER/A	powered off
unitA	D	powered on	D	←pair each other→	unitD	POWER/A	powered off
unitA	E	powered on	E	←pair each other→	unitE	POWER/A	powered off
unitA	POWER/A	powered off	POWER/A	←pair each other→	unitF	POWER/A	powered off
unitB	C	powered on	C	←pair each other→	unitC	B	powered on
unitB	D	powered on	D	←pair each other→	unitD	B	powered on
unitB	E	powered on	E	←pair each other→	unitE	B	powered on
unitB	B	powered on	B	←pair each other→	unitF	B	powered on
unitC	D	powered on	D	←pair each other→	unitD	C	powered on
unitC	E	powered on	E	←pair each other→	unitE	C	powered on
unitC	C	powered on	C	←pair each other→	unitF	C	powered on
unitD	E	powered on	E	←pair each other→	unitE	D	powered on
unitD	D	powered on	D	←pair each other→	unitF	D	powered on
unitE	E	powered on	E	←pair each other→	unitF	E	powered on

3) Choose which rider you will talk with

Pairing these riders seems a bit complicated, but using the intercom is very simple ☺

After you have paired with all the 6RMIs (you also could only pair with 4 riders), then you will can talk with one of the riders at a time.

STEP: after finishing the pairing procedure, confirm that all of 6RMIs have been powered on.

Initiate an intercom call (a short press one of intercom key A,B,C,D,E on your 6RMI), and then you can talk with one of other riders.

For example: A short press (< 1 second) the C Key on unit B, promptly release your hand, you will hear a beep "di", then wait about 3-5 seconds you could talk with rider C. if then you short press the E key, it will change the communication to talk with rider E.

Tips: Talk with unit F

Because there is not F key on the unit, so the way of calling unit F is different :

Short press A key on unit A, you will talk with E. Short press B key on unit B, you will talk with F.

.....Short press E key on unit E, you will talk with F.

Note: If two 6RMIs were out of range, they may will lose connection, when you come within range, you only need to initiate a intercom as normal.

Finish an interphone talking

You only need a short press of same one of the intercom (A, B, C, D, E) key, to terminate communications

Note: to reduce power consumption, when you do not need to talk, don't keep your 6RMI on intercom state in a long time

Music / Audio function

1) listen to navigation voice instruction from your GPS (this GPS should have a built-in A2DP enabled bluetooth transmitter)

a) Pair this GPS with your 6RMI

Be sure that you have turned off the bluetooth function on your mobile phone.

Be sure that the 6RMI is in the state of power off.

Long press the POWER/Rider A key on the 6RMI, until the red & blue LED flash.

Power on the GPS, hold the bluetooth key on the GPS until the red & blue LED flash.

About several seconds later, the red LED of the GPS and the 6RMI will extinguish at the same time, thus they have paired successfully.

b) Connect the GPS with the 6RMI, enjoy audio info of the GPS on the 6RMI.

Connect them follow the manual of the GPS, adjust screen tap sound and volume to an appropriate level on the GPS, then the user can enjoy the audio information on the 6RMI.

Note: please obey the bluetooth Power On sequence as below:

6RMI first, then GPS.

please obey the bluetooth Power Off sequence as below:

GPS first, then 6RMI

2) Listen to stereo music from your A2DP enabled cell phone

Read the user manual of your cell phone carefully, if your cell phone is A2DP enabled, the 6RMI can receive the stereo music from the cell phone.

Please note that only A2DP (stereo bluetooth) enabled cell phone can offer bluetooth music transmitting service.

You can use the Phone/Play key to pause/play the music from A2DP bluetooth devices.

3) Listen to music from some mono bluetooth enabled cell phone

Almost all of Nokia mono bluetooth enabled cell phone can offer bluetooth music transmitting service, but some model of other brand cell phone can not offer this service.

We do not promise that the 6RMI will support music function for all mono bluetooth enabled cell phones.

Step: confirm that your 6RMI has paired with your cell phone; play the music on the cell phone, and then you can enjoy the music on your 6RMI.

Note: for mono bluetooth cell phone, you can not use the Phone/Play key to operate the music, you only can operate the music on the phone.

4) listen to audio navigation info from your GPS via external bluetooth transmitter

The way is similar to 5) above.

5) listen to stereo music from MP3 which with a built in bluetooth transmitter

please familiarize yourself with Bluetooth function of your Bluetooth enabled MP3 (this MP3 must has Bluetooth transmitting function). read the instruction manual that came with the MP3 so you can enable its bluetooth function, pair the MP3 with the 6RMI according to the instruction manual of the MP3. play the MP3, you can listen to the music on your 6RMI.

Auto switch between different operations

While talking by intercom or listening to music, if it incomes a cell phone call, the voice will be switched to "cell phone talking" state automatically. After the call has been hung up, the system will auto return to intercom talking or music playing state.

While listening to music, short press the RIDER A or RIDER B,C,D,E key, it will initiate a intercom talking. after terminating the intercom talking, the system will return to the music automatically.

Note: it might needs about 5 seconds to auto-return to "intercom talking" state after the "cell phone talking" has been hung up.

troubleshooting

1. not working

Could be a flat battery, charge the BIM 3 hours.

2. Reset

In some regions of high RF strength ie near high power TV transmitters ,GSM station or airport radars, these can overwhelm the CPU in the BIM causing it to latch up.

Short press(< 1 second) Reset key on the 6RMI. when you turn on the 6RMI, it will work normally again.

3. No sound

Physically check to see the headset cables are ok or **the audio plug is real inserted in the jack**? swap with the other functioning 6RMI to localize the problem, have you turned to volume too low?

4. Whistling of the speakers

If the microphone is too closed a speaker, the speaker will make a whistling, take the microphone away from the speaker, reduce the volume by the Volume-key, it will be ok.

5. Lose connection with the cell phone or music from the cell phone

for some reason(e.g. In some regions of high RF strength), maybe the 6RMI will lose connection with the cell phone or music from the cell phone, a short press on the Phone/Play key, they will connect each other, or see the below 8.

6. can not connect with your mobile phone

This 6RMI can connect with a major of bluetooth enabled cell phone of main brand, but **we don't undertake that it can connect with all cell phone.** Before purchasing, please confirm that if the 6RMI could connect with your cell phone.

7. auto-power off

To cell phone call, intercom, music these different using, This 6RMI takes different Bluetooth profile, when change between different using, it will change to the corresponding profile.

Some cell phone maybe do not take standard bluetooth profile, when it connect with the 6RMI, some times it may cause turning the 6RMI off when the 6RMI are switching between three different state(call, intercom, music).

in this case, you could turn on the 6RMI again by pressing the Power/Interphone key, and note that only make the 6RMI working on two profile.

8. Final solution

If the solution of above clause 1.- 7. can not resolve the problem, turn your cellphone off (sometimes you may have to take off the battery of your cell phone and load the battery again) and your **6RMI**, then turn them on and pair them again.

9. Lose connection between two 6RMIs

If two **6RMIs** were out of range, they may will lose connection, when you come within range, you only need to initiate a intercom as normal.

OTHER FEATURES

- Digital Signal Processor (DSP) Technology for wind noise cancellation
- Excellent performance at speeds up to the legal limit with a full face helmet
- Easily mounts to all full face and open face helmets

GENERAL FEATURE

- Up to 7 hours talk time when connected to your cell phone
- UP to 7 hours time when listening to music
- 500 mAh Li Polymer battery -Standby time: 120 hours
- Charging time:~ 3 hours
- Chip brand: CSR

SPECIAL FEATURE

- All weather, rain and snow resistance

Thank you for using the 6 Riders Multi-Interphone !



6 Riders motorcycle multi-interphone